

Quadro[®]6L



Quadro6L: The IP PBX with 6 FXO Ports

Epygi designed the Quadro 6L for environments that require multiple ringing phones and shared trunk appearance visibility. It economically delivers a wealth of PBX features like voice mail, auto attendant, on-hold music or messaging, caller ID with distinctive ringing, call pickup, paging and intercom while providing key-system features in the default setup.

The Quadro 6L provides for as many as ten local IP extensions via the LAN connection. Users choose from a variety of Aastra IP telephone sets* with buttons that can be programmed for incoming phone lines and additional features. The Quadro 6L includes six separate FXO ports for PSTN lines, plus a WAN port for optional Internet calls. *Aastra 551, 57i, 9133, and 480i models as of February, 2008

Legacy Phone System Replacement

Epygi designed the Quadro 6L for deployment right out of the box as a turnkey solution. Using advanced plug-and-play IP phones and multiple FXO ports for PSTN access, this IP PBX functions as a key-system by default. As a bonus, Epygi delivers features not found on traditional key systems. Business enhancements include after-hours auto attendant and unified messaging among many others.

Effortless Administration

Sophisticated auto-recognition and auto-configuration capabilities between the Quadro 6L and Aastra phones simplify installation and operation. The administrator can modify automatic assignments through the graphical user interface.



CONSTRUCTION & COMMUNICATIONS CONTRACTORS
RR-10 BOX 10225-B SAN JUAN, PR 00926
Tel: 787-912-7690 / 787-908-5575

What are Your VoIP Benefits?

Key System Simplicity

True IP Solution

Turn Key Installation

No Expensive Licenses

Telephony

Voice Features

Voice Coding G.711, G.726 (16, 24, 32, 40 Kbps), G.729, iLBC (13,33 kbit/s, 15.2kbit/s);
(ITU-T: G711, G.726, G729 Annex A; RFC 3951 iLBC; IETF:ITU-T Q.23, Q.24, Bellcore GR.506, GR.181; ITU-T G.168-2000, 2002; ETSJ300659J ,2,3)
NAT traversal (both manually and STUN)
VAD, CNG, G.168 echo cancellation

Bandwidth Requirements

Per call WAN bandwidth requirements for the following codecs (non-encrypted/ VPN encrypted):
G.711 20 msec 84 kbps/105 kbps G.726-16 20msec 37 kbps/59 kbps G.726-24 20 msec 45 kbps/65 kbps G.726-32 20 msec 52 kbps/74 kbps G.726-40 20msec 60 kbps/80 kbps G.729a 20 msec 29 kbps/49 kbps iLBC 30 msec 27 kbps/41 kbps

PBX Features

Call blocking*, Forwarding, Hold, Transfer*
Call relay*, Call waiting*
Caller ID Detection, Voice mail*
Call park*, Pickup*, Paging*, Intercom*
Multilevel auto attendant with Interactive Voice Response (IVR) and VoiceXMLv2 support*
Voice mail with SMS notification*
Distinctive ringing*
Speed dialing*
Many extension ringing*
Receptionist
Call hunting*, Hiding Caller ID*
Automated Call back from
Auto Attendant*
Hold music
Call statistics
Do Not Disturb service*
Unified messaging*
3-way conferencing*
T.38 fax, fax relay and clear channel fax*
Unified Fax Messaging*
Busy auto-redial*
Directory assistance*
Dial plans (call routing)*
IP Routing*
Call Queue*
Key System Emulation

Call Signaling

SIP on the WAN and LAN side (RFCs: 3261, 3263, 3265, 3311, 3323, 3324, 3325, 3428, 3515, 3578, 3581, 3725, 3891, 3892, 3842, 3856, 3863, 4028, 4235)
SDP (RFC 2327)
RTP (RFCs: 1889, 1890, 2833, 3389, 3550, 3551, 3555, draft-ietf-avt-rf-c2833bis-05, draft-ietf-avt-rtp-llbc-05), in band and out of band signaling support
RTP Proxy
Fax over IP (ITU_T: T4, T30, T38, V17, V21, V27ter, V29).

POTS Signaling Loop start

FSK and DTMF caller ID support

* Features not available in Key System Emulation Mode

Connectivity

LAN IP Phones 10

SIP phones
Remote IP extensions may be enabled for all IP phones.

System Capacity

10 simultaneous VoIP calls with external parties
Remote IP extensions may be enabled for all IP phones.

Premise Connection IP Phones 1

Ethernet 100BASE T (RJ45).

Uplink Connection

6 FXO ports to the Central Office (RJ11)
1 Ethernet 1 DBASE T (RJ45)

Billing

Radius Client (RFCs: 2865, 2866)

Extensions

Up to 100 extensions including virtual, remote and local.
Extensions can be registered on different SIP servers.

Internet

STUN/NAT traversal (RFC 3489) IPSec VPN with DES, 3DES and AES encryption in tunnel mode (RFCs: 2402, 2406, 2409). Manual and automatic IKE key support PPTP VPN L2TP VPN Firewall security via:

NAT (Network Address Translation)
IDS
Policy and service-based filtering
Stateful inspection firewall DHCP

server on the LAN side DHCP client on the WAN side DNS server with forwarding functionality SNTP (Simple Network Time Protocol) server/client for computer clock synchronization

PPPoE connection to the ISP with PAP/(MS)CHAP authentication IP DIFFSERV for QoS Mail client to send voice and fax messages (.wav and .tif) as e-mail attachments and system notifications, DNS (DYNDNS) support with third party NAT/Router with port forwarding and port translation

System

Management

Multilingual WEB interface accessible from LAN and WAN (HTTP/HTTPS), Password control Remote diagnostics and software upgrade
Auto-provisioning VoIP Carrier Wizard
Download/restore configuration
Legible and editable configuration files
Auto-configuration of IP phones via TFTP and HTTP SNMP monitoring and configuration Third Party Call Control XML RPC is available to order
Reset button with factory reset option
Custom Language Pack Outlook
Feature Hot Call

Diagnostics/Testing

LEDs: Busy, Info/Fault, FXO1, FXO2, FXO3, FXO4, FXO5, FXO6. Remote testing and VoIP diagnostics Power-up diagnostics

Environmental

Physical Dimensions Desktop devices, wall-mountable: Measurements: 7.41" x 6.24" x 1.77" (19x16x4.5 cm)
Weight: 13 ounces (360 g)

Conditions


41 °F - 104°F (5°C - 40°C) operating temperature
41 °F - 140°F (5°C - 60°C) storage temperature
5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
Output 12.0 VDC; 1.5 A

Regulatory Compliance

Safety: UL 60950; CSA 22;
EMC: FCC Part 15 Class B;
EN55022 Class B, EN55024;
Telecom: CTR21/TBR21, AS/ACIF

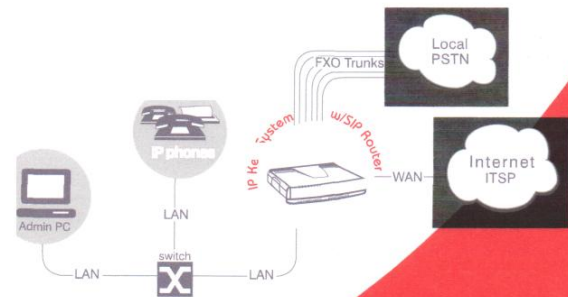

please contact

TB-Quadro6L-Let-13-01



CONSTRUCTION & COMMUNICATIONS CONTRACTORS
RR-10 BOX 10225-B SAN JUAN, PR 00926
Tel: 787.912.7698 / 787.908.5575

Epugi Technologies, Ltd.
6900 Dallas Parkway, Suite 850
Plano, Texas 75024
Tel/Fax: (+1)972.692.1166
Web: www.epugi.com
E-mail: sales@epugi.com

Technical Data: Quadro6L Version 5.0.x